




HSF RoHS



SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-25°c to +105°c

Contact Material:Phosphor Bronze
 Contact Plating:SN(120~150U") Over Ni (40~50U")
 Insulator Material:PA66(UL94V-0)

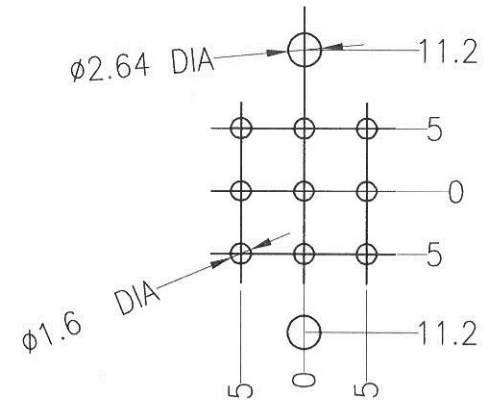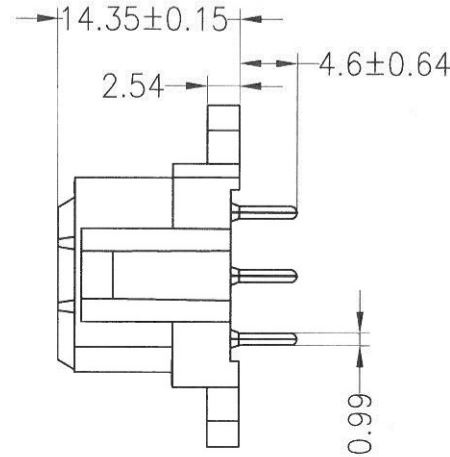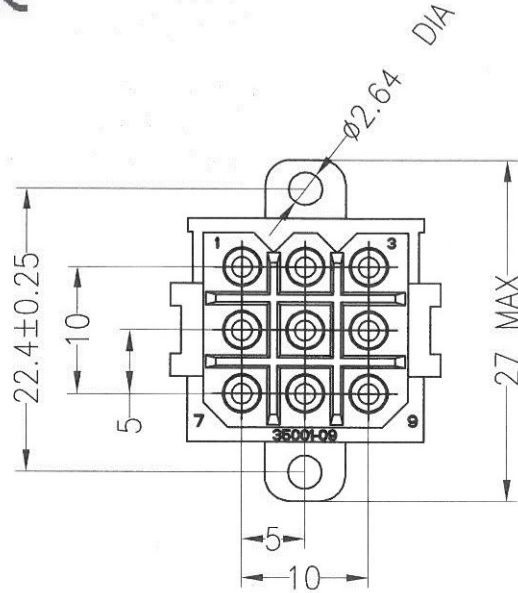

Ordering Information

35001 - 09 B SN S 01

No.of Pins
9P

Contact Plating
SN: Tin

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	BEN	15.10.05	SCALE	FIT	SHENZHEN JINLING ELECTRONIC CO.,LTD		
				X.X	±0.30				UNIT	mm			
B	2015.10.05	Change Plating			X.XX	±0.20	CHECK		SIZE	A4		PART NO.	E35001-09BSNS01
A0	2012.03.28	NEW DRAWING			X.XXX	±0.10			SHEET	1/1		TITLE:	5.00 9P Red Connector
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle	±3°	APPROVE		PROJ.				
					DIM	TOL							